



Project	
Notes	
Type	Date
Cat. No.	

**LIS™ Series** LED Indoor Wall Sconce



**DESCRIPTION**  
 The LIS Series is a contemporary wall sconce fixture updated with the latest LED technology. The LIS provides accent illumination that visually expands the space and creates a relaxing atmosphere. The long LED life coupled with exceptional color rendering make this fixture attractive for new or retrofit projects. Ideal for use in hallways, stairways, dining areas, foyers and meeting rooms for residential and commercial applications.

**Specification Features**



**Construction**  
 Curved white lens with die-cast aluminum plate trim.

**Electrical**  
 Equipped standard with 120V 15-100% dimming driver.

**Qualifications**  
 All luminaires are built to UL 1598 and 2108 standards, and bear appropriate ETL labels. Damp location labeling is standard. Emergency equipped fixtures labeled UL924. Adheres to LM70, LM80, and TM21 industry standards. ENERGY STAR® certified product (for 3000K and 4000K only) and Title 24 qualified. Dedicated 120V Models are FCC Title 47 CFR, Part 15, Class B for residential and commercial applications. California Title 24 Compliant, JA8 compliant, CEC Listed.

**Installation**  
 Designed for wall mounting on 4" electrical J-Box.

**Warranty**  
 3-year Limited Warranty. See warranty documentation for more information.

**LIS™ Series**  
 17W(1400 Lumens)

Rated Life 50,000 hours  
 Limited Warranty 3 years  
 Efficacy Up to 82 LPW



**Quick Ship**

LIS-17-120D-MCT-BN

**Ordering Information**


Example: LIS-17-120D-MCT-BN

RWS	17	120	MCT	BN
<b>Series</b>	<b>Rated Wattage</b>	<b>Driver Type</b>	<b>Color Temp</b>	<b>Finish</b>
LIS LED Indoor Wall Sconce	17W- 17W 1400 Lumens	120D- 120V, Triac Dimming	MCT- CCT Adjustable, 3000K, 3500K, 4000K 80+ CRI	BN - Brushed Nickel

**Performance Summary**

Input Voltage	120V
Input Frequency	50/60 Hz
Rated Wattage	See Performance Table
Delivered Lumens	See Performance Table
Efficacy	> 70 LPW (typ.)
CRI	80+, R8
Available CCT	3000K, 3500K, 4000K
Color Consistency	5-step MacAdam Ellipse
Rated Life	50,000 hours
L70	> 72,000 hours or > 45,000
Power Factor	> 0.9
THD	< 20%
Dimming	N/A
Operating Temp.	-18°C to 40°C

**Product Dimensions**

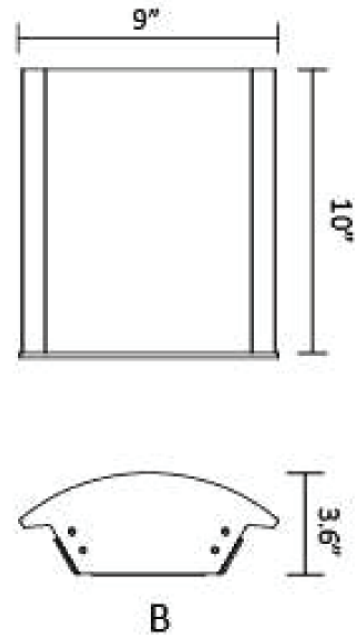

**Performance Data**

Lens Type	Form Factor	Catalog No.	Rated Wattage (W)	Delivered Lumens	Efficacy (lm/W)
Frosted Glass		LIS-17-120D-MCT	17	1400	82

NOTES:

- <sup>1</sup> Made to order items. Minimum 90 day lead time. Minimum 500 order quantity.
- <sup>2</sup> Energy star listed
- <sup>3</sup> Quick ship: 3000K. Other CCTs may require a lead time or be special order
- <sup>4</sup> Typical color consistency may vary or changed.
- <sup>5</sup> L70 hours calculated based on LED package manufacturer LM80 report and ISTMT report of LED in luminaire. Stated values are for select catalog numbers. Contact manufacturer for detailed information
- <sup>6</sup> Actual performance may differ as a result of end-user environment and application. All values are design or typical values, measured under laboratory conditions at 25 °C.