


Ordering Information

Dimensions

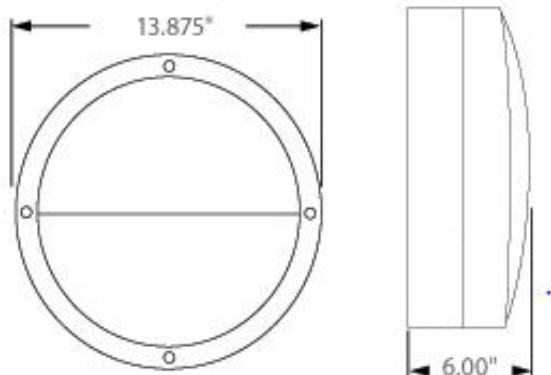

Specification Features

Construction

Rugged die cast aluminum housing withstands outdoor environments. Outer surface treated with durable power coating to provide resistance to corrosion, rust, weathering, and or degradation. Performance engineered internal heat dissipation fins provide superior thermal management for LED life and reliability. Lens design and materials provide uniform appearance without pixelation.

Qualifications

All luminaires are built to UL 1598 and 2108 standards, and bear appropriate ETL labels. Wet location labeling is standard. Emergency equipped fixtures labeled UL924. Adheres to LM70, LM80, and TM21 industry standards.

Warranty

5-year Limited Warranty. See warranty documentation for more information.

Electrical

120V Driver operates at 60Hz

Installation

Designed for mounting on 4" electrical J-Box.



ABH Series

13-13W (1300 Lumens)

26- 26W (2400 Lumens)

Rated Life 60,000 hours

Limited Warranty 5-years

Efficacy Up to 100 LPW

Quick ship

Made to order only

Ordering Information

Example: ABH-13-120-830

ABH	13	120	8	30		
Series ABH Architectural LED Bulkhead	Rated Wattage 13-13W (1300 Lumens) ¹ 26- 26W (2400 Lumens)	Driver Type 120-120V ¹	CRI 8 80+ CRI	Color Temp 30 3000K ¹ 40 4000K ¹		

Specifications and Dimensions subject to change without notice.

¹ Made to order items. Minimum 90 day lead time. Minimum 500 order quantity.