


High Performance Design Can Customize To Your Environment

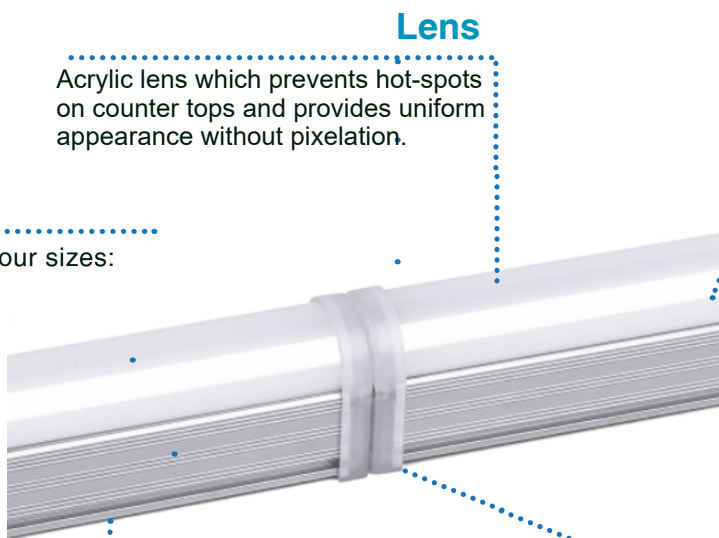

Lens

Acrylic lens which prevents hot-spots on counter tops and provides uniform appearance without pixelation.

High efficiency LED's

60,000 hour LED's at L80 reduce life cycle maintenance costs

Length

Available in apertures of four sizes: 12", 24", 36" & 48".

Installation

Each unit is designed for surface mounting using two fasteners. (Included)

Linkable

Seamless and no dark spot female to male connection. Optional extended connection cable.


Housing

Low profile steel housing available in white.

GLEED Wattage Comparison


Retail stores, hospitality, Kitchens, food storages

Model: GLED-24-9-120-830-WH

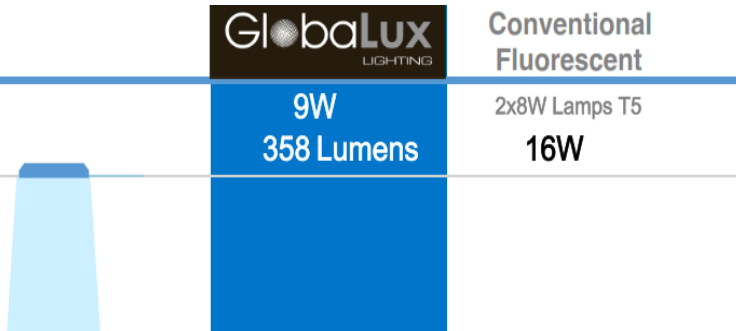

Ordering Information

Dimensions

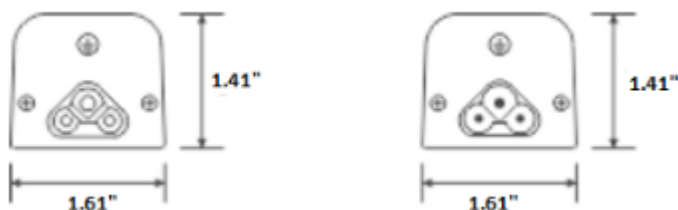

Specification Features

Construction

Low profile steel housing available in white, nickel, satin, or oil rubbed bronze finishes. Designed to prevent "hot spots" on counter tops. Lens design and materials provide uniform appearance without pixilation.

Qualifications

All luminaires are built to UL 1598 and 2108 standards, and bear appropriate ETL labels. Damp location labeling is standard. Emergency equipped fixtures labeled UL924. Adheres to LM70, LM80, and TM21 industry standards. ENERGY STAR® certified product (3000K) and Title 24 qualified. Dedicated 120V Models are FCC Title 47 CFR, Part 15, Class B for residential and commercial applications. California Title 24 Compliant, JA8 compliant, CEC Listed.

Electrical

Equipped standard with 120V fixed output driver, operating at 60Hz. On/Off Rocker Switch Standard. Ships standard with 3' Power Cord.

Installation

Each unit is secured to mounting surface using two fasteners. All mounting hardware included.

Warranty

3-year Limited Warranty. See warranty documentation for more information.



GLED Series

- 12- 12" Length
- 24- 24" Length
- 36- 36" Length
- 48- 48" Length

Rated Life 50,000 hours
Limited Warranty 3 years
Efficacy Up to 51 LPW

Quick Ship

- GLED-12-5-120-830-WH
- GLED-24-9-120-830-WH
- GLED-36-14-120-830-WH
- GLED-48-15-120-830-WH

Ordering Information

Example: GLED-12-5-120-830-WH

UCL	5	120D	9	30		
Series GLED T5 Linkable LED Undercabinet Fixture	Form Factor 12- 12" Length ² 24- 24" Length ² 36- 36" Length ² 48- 48" Length ²	Rated Wattage 5- 5W, 12" Length ² 9- 9W, 24" Length ² 14-14W, 36" Length ² 15-15W, 48" Length ²	Driver Type 120- 120V	CRI 8 80+ CRI	Color Temp 30-3000/4000 Kelvin	Finish WH- White ²
Options						
Accessories GLED-EC-12 - 12" Extension Cable for GLED GLED-EC-24 - 24" Extension Cable for GLED GLED-PC-36- 6' Power Cable for GLED						

Specifications and Dimensions subject to change without notice.