


# Ordering Information

## Dimensions

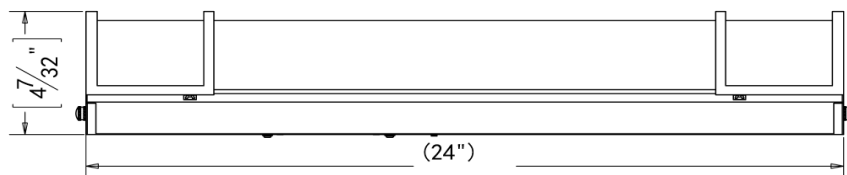

### RVL Series

- 24" Length**  
18W, 2000 Lumens
- 36" Length**  
27W, 2600 Lumens
- 48" Length**  
36W, 3400 Lumens

## Specification Features



### Construction

Twin steel rings surround a milk white acrylic diffuser provides widespread and even illumination. Lens design and materials provide uniform appearance without pixelation.

### Qualifications

All luminaires are built to UL 1598 and 2108 standards, and bear appropriate ETL labels. Damp location labeling. Adheres to LM70, LM80, and TM21 industry standards. ENERGY STAR® certified product (for 3000K and 4000K only) and Title 24 qualified. Dedicated 120V Models are FCC Title 47 CFR, Part 15, Class B for residential and commercial applications. California Title 24 Compliant, JA8 compliant, CEC Listed.

### Electrical

Equipped standard with 120-277V fixed output driver operating at 60 Hz.

### Installation

Designed for wall mounting on 4" electrical J-Box.

- Rated Life 60,000 hours
- Limited Warranty 3 years
- Efficacy up to 118 LPW
- Dimming N/A

### Warranty

3-year limited warranty. See complete warranty for terms and exclusions. (Labor not included).



Quick Ship

## Ordering Information

Example: RVL-24-26-MV-930-NS

RVL	24	26	MV	CRI	30	30
<b>Series</b>	<b>Form Factor</b>	<b>Rated Wattage</b>	<b>Driver Type</b>	<b>CRI</b>	<b>Color Temp</b>	<b>Finish</b>
RVL LED Ringed Light Vanity	24- 24" Length <sup>2,3</sup> 36- 36" Length <sup>2,3</sup> 48- 48" Length <sup>2,3</sup>	<b>24" Length</b> 18W, 2000 Lumens <b>36" Length</b> 27W, 2600 Lumens <b>48" Length</b> 36W, 3400 Lumens	120- 120V <sup>1</sup> MV- 120-277V	9 90+CRI	30 3000K <sup>3</sup> 40 4000K <sup>3</sup>	ORB- Oil Rubbed Bronze NS- Nickel Statin

Specifications and Dimensions subject to change without notice

<sup>1</sup> Made to order items. Minimum 90 day lead time. Minimum 500 order quantity.

<sup>2</sup> Energy star listed