

| | | | | |
|---------|-------|------|------|----------|
| PROJECT | NOTES | TYPE | DATE | CAT. No. |
|---------|-------|------|------|----------|

TRK2

Track Light Fixture



The TRK2 Series Family of track light fixtures are offered in attractive brushed nickel or black finish options. The TRK2 Track lights are designed for superior directional lighting distribution without taking away from the interior design of any living space. Gimbal heads provides superior lighting for living spaces such as living rooms, bedrooms and more. Adjustable light heads will offer you more flexibility and will allow you to point the light in areas where you need it the most. This indoor light is rated for use in damp locations. Strategically designed using premium quality materials, this light provides a durable and long-lasting functionality to give your home the perfect illumination.




| | |
|------------------|----------------------|
| INPUT VOLTAGE | 120V |
| INPUT FREQUENCY | 60 Hz |
| RATED WATTAGE | See Performance Data |
| DELIVERED LUMENS | See Performance Data |
| EFFICACY | 76.9 LPW |
| CRI | 80CRI |
| AVAILABLE CCT | 3000K |
| LENS TYPE | N/A |

| | |
|-----------------|---------------------------------|
| RATED LIFE | 25,000hrs (Based on 3hrs a Day) |
| L70 | N/A |
| POWER FACTOR | 0.7 |
| THD | <20% |
| DIMMING | 120V (10-100%) |
| OPERATING TEMP. | 32°F - 104°F / 0°C to 40°C |
| BEAM ANGLE | N/A |

ORDER INFO / EXAMPLE: TRK2-6-GU10-120D-830-BN

QUICK SHIP ITEMS ON PG.2

| SERIES | FORM FACTOR | RATED WATTAGE | DRIVER TYPE | COLOR TEMP | FINISH |
|-----------------------------|--------------------------|---|------------------------|-------------------|------------------------------------|
| TRK2 | 6 | GU10 | 120D | 830 | BN |
| TRK2 Track Light Fixture | 6- 6 Light 44" Length | 6" Light Housing GU10- 6x50W GU10 Halogen Lamps | 120D- 120V; 10-100% | 830- 3000K; 80CRI | BL- Black BN- Brushed Nickel |

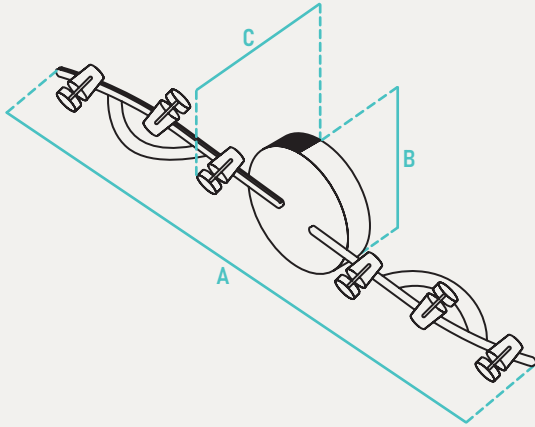


PERFORMANCE DATA

| FORM FACTOR | KELVIN | RATED WATTAGE | DELIVERED LUMENS | EFFICACY (LM/W) |
|-------------|--------|---------------|------------------|-----------------|
| 6 Light | 3000K | 6x50W | N/A | N/A |

QUICK SHIP

TRK2-6-GU10-120D-830-BN

ADDITIONAL IMAGES

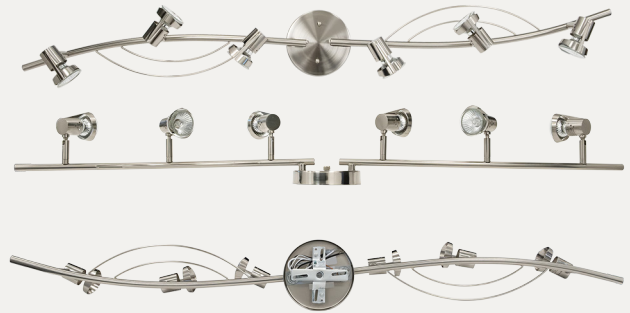

RECOMMENDED DIMMERS

DVCL-153P (Lutron)

Made to order items. Minimum 90 day lead time.
 Minimum order quantity may vary please contact sales.
¹ DLC Listed / ² DLC Premium Listed / ³ Title 24 / ⁴ JA8 & Title 24
 Typical color consistency. May vary or be changed. L70 hours calculated based on LED package manufacturer LM80 report and ISTMT report of LED in luminaire. Stated values are for select catalog numbers. Contact Globalux for detailed information.
 Actual performance may differ as a result of end-user environment and application. All values are design or typical values, measured under laboratory conditions at 25 °C.

| | A | B | C | Case QTY |
|--------|-------|----------|--------|----------|
| TRK2-6 | 44" W | 5-1/4" H | 4-7/8" | 6 |

CONSTRUCTION

Die Cast Aluminum Heads on a curved aluminum frame. Each of the track heads is mounted on a swivel to allow them to be moved and adjusted for customized, directional lighting.

ELECTRICAL

LED models equipped standard with 120V, 10-100% dimming driver operating at 60Hz.

QUALIFICATIONS

All luminaires are built to UL 1598 and 2108 standards, and bear appropriate ETL labels. Wet location labeling is standard. Emergency equipped fixtures labeled UL924. Adheres to LM70, LM80 and TM21 industry standards. Dedicated 120V Models are FCC Title 47 CFR, Part 15, Class B for residential and commercial applications.

INSTALLATION

Designed for ceiling mounting on 4" electrical J-Box.

WARRANTY

3-year Limited Warranty. See warranty documentation for more info.

COMPATIBLE JUNCTION BOXES



4" PVC



4" Octagon



4" PVC Ceiling Box



3-1/2" Octagon



4" Round Pancake



4" Octagon / V Bracket