


Ordering Information

Dimensions



Specification Features

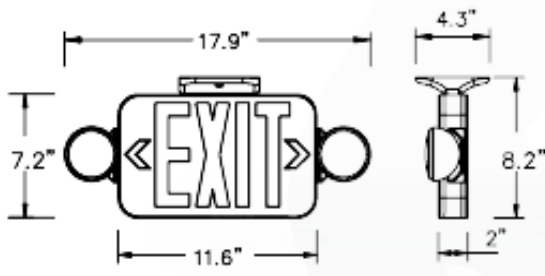

Construction

Injection molded, engineering grade 5VA flame retardant, high impact resistant thermoplastic in white or black finish. Aesthetically pleasing, curved faced rounded corner design. EZ snap-out Chevron directional indicators.

Qualifications

Meets UL924, NFPA 11 life safety Code, NEC, OSHA Local and State Codes. UL listed for damp locations (0° C - 50° C).

Warranty

5-year Limited Warranty on all electronics and housing. Battery pro rated for 5 years.

Electrical

Dual 120/277 voltage. Charge rate/power "ON" LED indicator light and push-to-test switch for mandated code compliance testing. 3.6 long-life, maintenance-free, rechargeable NiCad battery. Internal solid-state transfer switch automatically connects the internal battery to the LED lamp head for minimum 90-minute emergency illumination. Fully automatic solid-state, two-rate charger initiates battery charging to recharging a discharged battery in 24 hours.

Installation

Universal knockout pattern on back plate for wall mount. EZ-snap thermoplastic mounting canopy included provides top or end mount.

LCXS Series

LCXS-2-W-R
LCXS-2-W-G

Limited Warranty 5-years

Quick Ship

LCXS-2-W-GR
LCXS-2-B-GR

Ordering Information

Example: LCXS-2-W-GR

LCXS	2	W	R			
Series LCXS LED Combo Exit/Emergency Sign	Faces 2	Housing W- White B- Black	Lettering GR- Green/Red	Options AC- AC only		

Specifications and Dimensions subject to change without notice.

⁴ LCXS also has the option of Self Diagnostic and remote capable.