


## SAFETY INSTRUCTIONS

## PLEASE READ THESE INSTRUCTIONS CAREFULLY AND SAVE THEM, AS YOU MAY NEED THEM AT A LATER DATE.

- 1. TURN OFF ELECTRICITY at main fuse box (or circuit breaker box) before beginning installation by switching circuit breaker off or removing fuse.
- 2. MIN 75 DEGREE C SUPPLY CONDUCTORS.
- 3. CONSULT A QUALIFIED ELECTRICIAN TO ENSURE CORRECT BRANCH CIRCUIT CONDUCTOR.
- 4. If in doubt about electrical installation, consult a licensed electrician


## NEEDED TOOLS

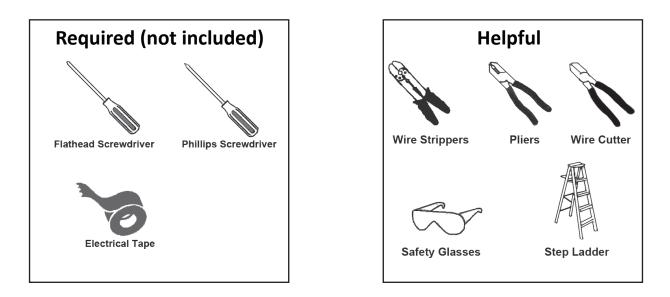


## INSTRUCTIONS

Before beginning assembly and installation of product, make sure all parts are present. Compare parts with package contents list and diagram above. If any part is missing or damaged, do not attempt to assemble, install or operate the product. Contact customer service for replacement parts. Estimated Assembly Time: 35 minutes

1. Remove the Diffuser(I) and Frame(J) from the Canopy(H) by loosening four thumb screws(K).




2. Strip 1/2 inch of insulation from wire ends. Twist stripped ends together with pliers black to black (power) and white to white (neutral). Attach copper wire to ground wire. If necessary, attach copper ground wire to grounded junction box.




GlobaLux Lighting LLC – 2037 S. Vineyard Ave. Ontario, CA 91761 – 909-591-7605 Fax: 909-590-3220 www.globaluxlighting.com



3. Attach wire nuts(D). Tape wire nuts(D) and wires together with electrical tape.



4. Attach the fixture to the ceiling by aligning the wire nuts that protrudes from the wall(A) to the hole in the ceiling plate(H), and tighten screws(B)



5. Set Diffuser(I) into frame(J). Position frame(J) over back canopy(H) and screw with four thumb screws(K).

