


Ordering Information

Dimensions

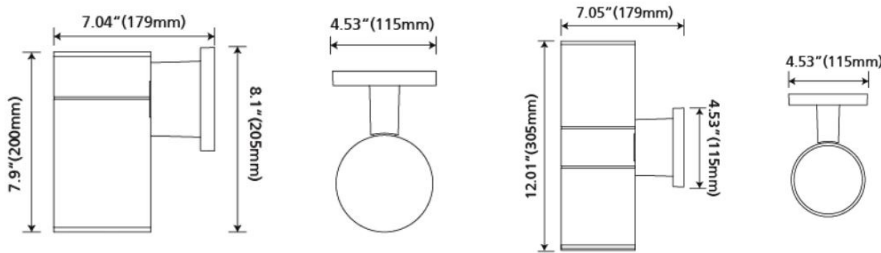

DOWN ONLY

UP & DOWN



LOC Series

12W, 1100 Lumens
24W, 2200 Lumens



Specification Features

Construction

Rugged die cast aluminum housing withstands outdoor environments. Outer surface treated with durable power coating to provide resistant to corrosion, rust, weathering, and or degradation. Performance engineered internal heat dissipation fins provide superior thermal management for LED life and reliability. Clear Tempered glass lens.

Qualifications

All luminaires are built to UL 1598 and 2108 standards, and bear appropriate ETL labels. Wet location labeling is standard. Emergency equipped fixtures labeled UL924. Adheres to LM70, LM80, and TM21 industry standards. ENERGY STAR® certified product (for 3000K only). Dedicated 120V Models are FCC Title 47 CFR, Part 15, Class B for residential and commercial applications.

Electrical

Equipped standard with fixed output 120V driver operating at 60Hz. Long Life LED's, 60,000 hours at L80 with projected life over 100,000 hours for reduced life cycle maintenance costs. Two LED color (Kelvin) temperature options and > 80 CRI.

Installation

Designed for wall mounting on 4" electrical J-Box.

Warranty

3-year Limited Warranty. See warranty documentation for more information.

Rated Life 60,000 hours
Limited Warranty 3 years
Efficacy Up to 92 LPW

Quick Ship

LOC-D-12-120-830-BL
LOC-UD-24-120-830-BL

Ordering Information

Example: LOC-UD-24-120-830-ORB

LOC	UD	24	120	8	30	ORB
Series LOC LED Outdoor Cylinder	Distribution D- Down Only ² UD- Up & down ²	Rated Wattage <u>Down Only</u> 12- 12W (1100 Lumens) ² <u>Up &Down Only</u> 24- 24W (2200 Lumens) ²	Driver Type 120- 120V ²	CRI 8 80+ CRI	Color Temp 30 3000K 40 4000K ¹	Finish BL- Black

Specifications and Dimensions subject to change without notice.

¹ Made to order items. Minimum 90 day lead time. Minimum 500 order quantity.

² Energy star listed