

PROJECT	NOTES	TYPE	DATE	CAT. No.
---------	-------	------	------	----------



## LXS

### Bi-Color LED Exit Sign

The LXS series is a compact low profile Exit sign that combines an attractive, easy-to-install; compact contemporary design with proven, ultra-reliable electronics to provide the very best in energy efficient emergency lighting. LXS units are completely self-contained, and feature universal mounting, canopy included. Ideal for application requiring attractive, quick-installation exit sign and low energy consumption.




INPUT VOLTAGE	120-277V
INPUT FREQUENCY	50/60 Hz
RATED WATTAGE	1W
DELIVERED LUMENS	N/A
EFFICACY	N/A
CRI	>70CRI
AVAILABLE CCT	N/A
LENS TYPE	N/A

RATED LIFE	30,000hrs (Based on 3hrs a Day)
L70	N/A
POWER FACTOR	>0.45
THD	N/A
DIMMING	N/A
OPERATING TEMP.	32°F - 104°F / 0°C to 40°C
BEAM ANGLE	120°

#### ORDER INFO / EXAMPLE: LXS-2-W-GR

QUICK SHIP ITEMS ON PG.2

SERIES	FACES	HOUSING COLOR	LETTERING	OPTIONS
LXS	2	W	GR	
LXS LED Exit Sign	2- 2 Faces	W- White B- Black	GR- Green / Red Selectable	BLANK- 90 Minute Battery Backup AC- AC Only

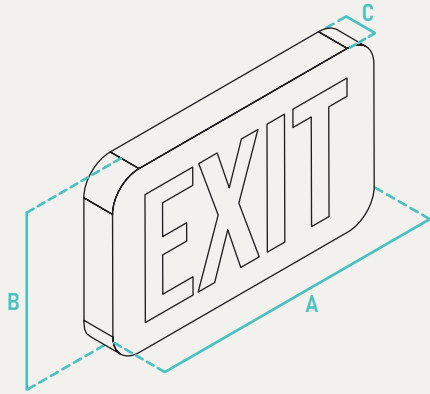

	A	B	C	Case QTY
LCXS	11-5/8" W	7-1/8" H	1-5/8" D	6

### CONSTRUCTION

Injection molded, engineering grade 5VA flame retardant, high impact resistant thermoplastic in white or black finish. Aesthetically pleasing, curved faced rounded corner design. EZ snap-out Chevron directional indicators.

### ELECTRICAL

Dual 120/277 voltage. Charge rate/power "ON" LED indicator light and push-to-test switch for mandated code compliance testing. 1.2V long-life, maintenance - free, rechargeable NiCad Battery. Internal solid-state transfer switch automatically connects the internal battery to the LED lamp head for minimum 90-minute emergency illumination (on select models). Fully automatic solid-state, two-rate charger initiates battery charging to recharging a discharging battery.

### QUALIFICATIONS

Meets UL924, NFPA 11 life safety Code, NEC, OSHA Local and State Codes. UL listed for damp locations ( 0Å° C - 40Å° C )

### INSTALLATION

Universal mounting pattern knock-out in back plate for J-Box mounting. EZ-Snap mounting canopy included for top or end mount.

### WARRANTY

5-year Limited Warranty on all electronics and housing. Battery pro rated for 5 years.

### PERFORMANCE DATA

FORM FACTOR	KELVIN	RATED WATTAGE	DELIVERED LUMENS	EFFICACY (LM/W)
LXS	N/A	1W	N/A	N/A

### QUICK SHIP

LXS-2-W-GR

### ADDITIONAL IMAGES



Made to order items. Minimum 90 day lead time.

Minimum order quantity may vary please contact sales.

<sup>1</sup> DLC Listed / <sup>2</sup> DLC Premium Listed / <sup>3</sup> Title 24 / <sup>4</sup> JA8 & Title 24

Typical color consistency. May vary or be changed. L70 hours calculated based on LED package manufacturer LM80 report and ISTMT report of LED in luminaire. Stated values are for select catalog numbers. Contact GlobaLux for detailed information.

Actual performance may differ as a result of end-user environment and application. All values are design or typical values, measured under laboratory conditions at 25 °C.