




LED Round Disk Light  
RDL Series

Globalux  
LIGHTING

# High Performance Design Can Customize To Your Environment

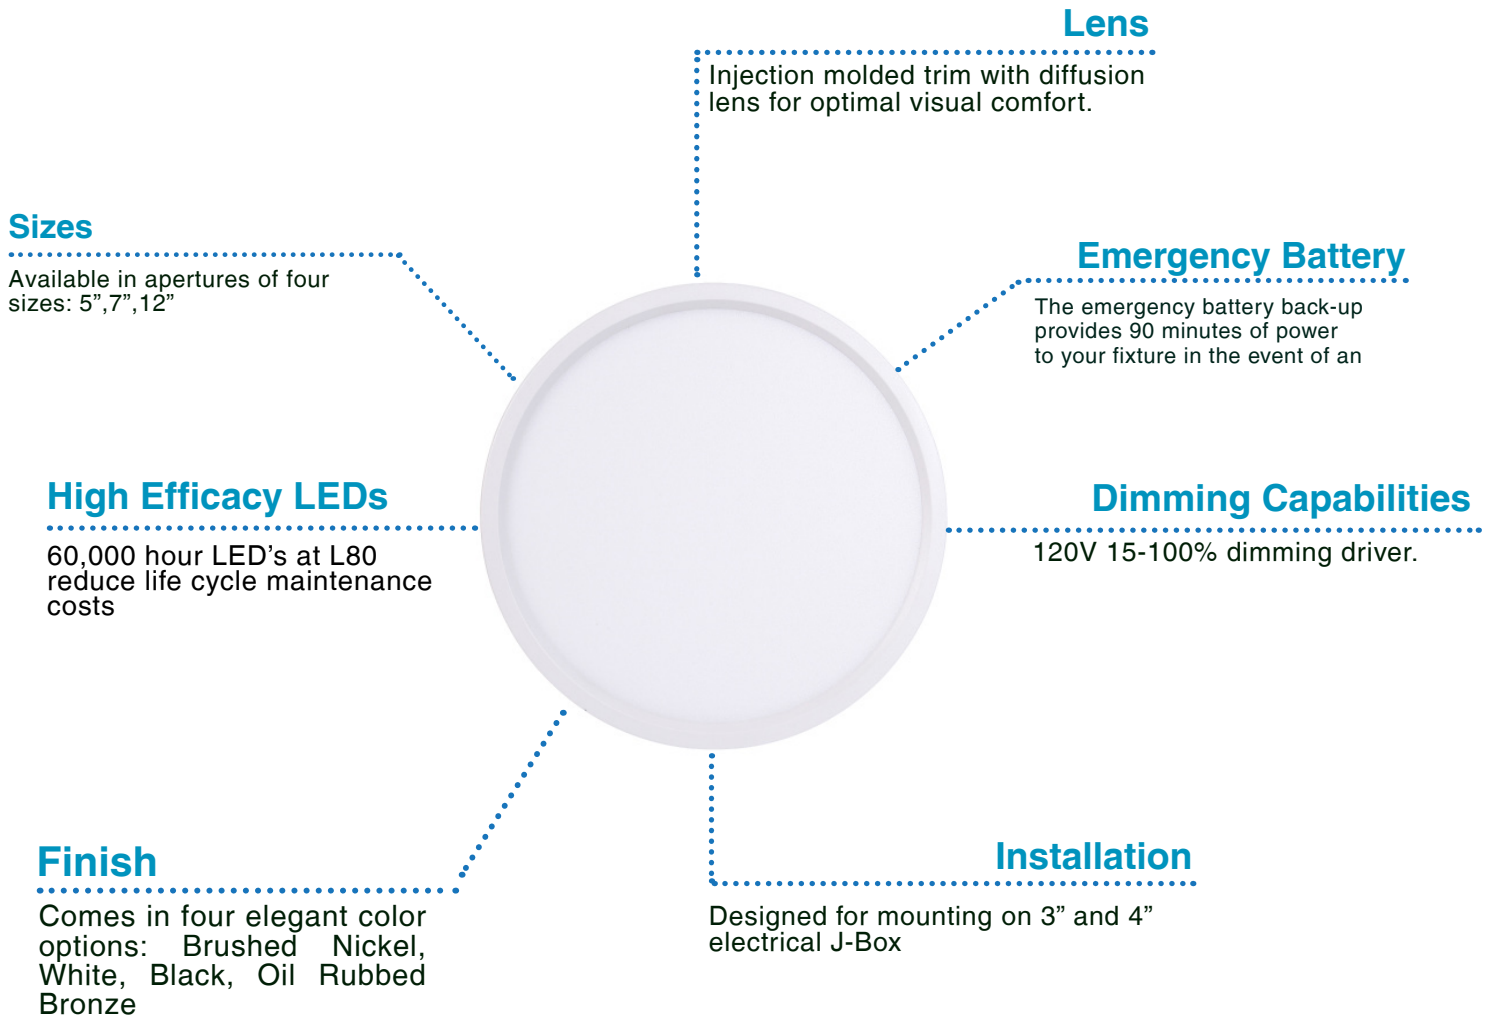



## RDL Wattage Comparison

	GlobalLux LIGHTING	Conventional Fluorescent	Conventional Incandescent
Utility rooms, office areas <small>Model: RDL-12-22-120D-930</small>	22W 1,400 Lumens	46W-52W	150W
Storage rooms, hallways <small>Model: RDL-7-15-120D-930</small>	15W 1,016 Lumens	26W-32W	100W
Storage rooms, hallways <small>Model: RDL-5-10-120D-930</small>	10W 580 Lumens	18W-23W	75W

# Ordering Information

## Dimensions

RDL-5: 5 3/8"(137mm)  
RDL-7: 7 7/8"(201mm)  
RDL-12: 12"(306mm)

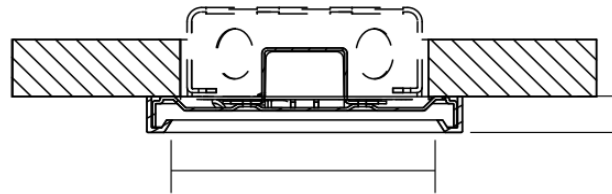

RDL-5: 4 1/2"(115mm)  
RDL-7: 7"(179mm)  
RDL-12: 11"(280mm)



## Specification Features

### Construction

Injection molded trim with diffusion lens for optimal visual comfort while providing exceptional light output. Edge Lit technology and Lens design and materials provide uniform appearance without pixelation.

### Qualifications

All luminaires are built to UL 1598 and 2108 standards, and bear appropriate ETL labels. Wet location labeling is standard. Emergency equipped fixtures labeled UL924. Adheres to LM70, LM80, and TM21 industry standards. ENERGY STAR® certified product (for 3000K and 4000K only) and Title 24 qualified. Dedicated 120V Models are FCC Title 47 CFR, Part 15, Class B for residential and commercial applications. California Title 24 Compliant, JA8 compliant.



### Electrical

Equipped standard with 120V 10-100% dimming driver.

### Installation

Designed for mounting on 3" or 4" electrical J-Box.

### Warranty

3-year Limited Warranty. See warranty documentation for more information.

### RDL Series

#### 5" Housing

10W, 580 Lumens

#### 7" Housing

15W, 1050 Lumens

#### 12" Housing

22W, 1400 Lumens

Rated Life 50,000 hours

Limited Warranty 3 years

Efficacy Up to 64 LPW

Continuous Dimming



### Quick Ship

RDL-5-10-120D-930-WH  
RDL-7-15-120D-930-WH  
RDL-12-22-120D-930-WH

## Ordering Information

Example: RDL-5-10-120D-930-BN


RDL	11	10	120D	9	30	BN
<b>Series</b>	<b>Diameter</b>	<b>Rated Wattage</b>	<b>Driver Type</b>	<b>CRI</b>	<b>Color Temp</b>	<b>Finish</b>
RDL LED Round Low Profile Flush	5-5" <sup>2</sup> 7- 7" <sup>2</sup> 12-12" <sup>1</sup>	<b>5" Housing</b> 10- 10W, 580 Lumens <sup>2</sup> <b>7" Housing</b> 15- 15W, 1050 Lumens <sup>2</sup> <b>12" Housing</b> 22- 22W, 1400 Lumens <sup>2</sup>	<b>120D-</b> 120V Dimming, Dims to 10% <b>277-</b> 277V <sup>2</sup>	<b>9</b> 90+ CRI	<b>30</b> 3000 K <sup>2</sup> <b>40</b> 4000 K <sup>2</sup>	<b>BL-</b> Black <b>BN-</b> Brushed Nickel <b>WH-</b> White <b>ORB-</b> Oil rubbed Bronze
<b>Options and Accessories</b>						
		<b>EM-RDL-7-WH</b> 7" Emergency Battery	<b>Trim- RDL-7-BN</b> 7" Nickel Trim			
		<b>EMBX-RDL-7-WH</b> 7" Blank Box for EM	<b>Trim- RDL-7-BL</b> 7" Black Trim			
			<b>Trim- RDL-12-BN</b> 12" Nickel Trim			
			<b>Trim-RDL-12-BL</b> 12" Black Trim			
			<b>Trim- RDL-5-BN</b> 5" Nickel Trim			
			<b>Trim- RDL-5-BL</b> 5" Black Trim			

Specifications and Dimensions subject to change without notice.

<sup>1</sup> Made to order items. Minimum 90 day lead time. Minimum 500 order quantity.


<sup>2</sup> Energy star listed

# Adders Options & Accessories

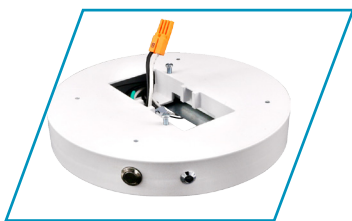


## Emergency Battery

The emergency battery back-up provides 90 minutes of power to your fixture in the event of an emergency.

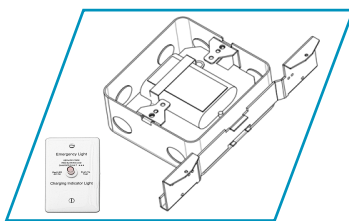

## Emergency Battery

The emergency battery back-up provides 90 minutes of power to your fixture in the event of an emergency.



## Trims

RDL Comes in four elegant colors: Brushed Nickel, White, Black, Oil Rubbed Bronze

### Emergency Battery Back-up

**EM-RDL-7-WH** 7" Emergency Battery  
**EMBX-RDL-7-WH** 7" Blank Box for EM unit  
**EML-JB-AC** Junction Box with AC Emergency Battery Backup

### Trims

**Trim- RDL-5-BN** **Trim-RDL-12-BN**  
**Trim-RDL-5-BL** **Trim-RDL-12-BL**  
**Trim-RDL-7-BN**  
**Trim-RDL-7-BL**