

PROJECT	NOTES	TYPE	DATE	CAT. No.
---------	-------	------	------	----------



EXS

Edge Lit LED Exit Sign

The EXS series is an surface mount edge lit LED exit sign that features an architectural, slim design to fit into any environment offering specification grade aesthetics with in field installation flexibility. Attractive and functional, the EXS series is completely self-contained and utilizes reliable, energy efficient LED illumination. EXS series edge-lit exits are well suited for any application requiring attractive edge-lit exit sign. Typical installations include commercial spaces such as retail, offices or medical facilities but can be applied in any space where an upgrade appearance is desired.




INPUT VOLTAGE	120-277V
INPUT FREQUENCY	50/60 Hz
RATED WATTAGE	3W
DELIVERED LUMENS	See Performance Data
EFFICACY	N/A
CRI	>70CRI
AVAILABLE CCT	N/A
LENS TYPE	N/A

RATED LIFE	30,000hrs (Based on 3hrs a Day)
L70	N/A
POWER FACTOR	>0.45
THD	N/A
DIMMING	N/A
OPERATING TEMP.	32°F - 104°F / 0°C to 40°C
BEAM ANGLE	120°

ORDER INFO / EXAMPLE: EXS-1-A-R-AC

QUICK SHIP ITEMS ON PG.2

SERIES	FACES	HOUSING COLOR	LETTERING	BATTERY
EXS	1	A	R	AC
EXS Edge Lit LED Exit Sign	1- 1 Face (Transparent Panel) 2- 2 Faces (Mirror Panel)	A- Aluminum W- White B- Black	R- Red G- Green	BLANK- 90 Minute Battery Backup AC- AC Only

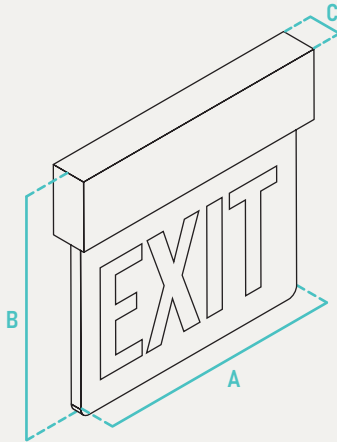

PERFORMANCE DATA

FORM FACTOR	KELVIN	RATED WATTAGE	DELIVERED LUMENS	EFFICACY (LM/W)
EXS	N/A	3.5W	N/A	N/A

QUICK SHIP

EXS-1-A-G	EXS-1-A-R
EXS-2-A-G	EXS-2-A-R

ADDITIONAL IMAGES



Made to order items. Minimum 90 day lead time.

Minimum order quantity may vary please contact sales.

¹ DLC Listed / ² DLC Premium Listed / ³ Title 24 / ⁴ JA8 & Title 24

Typical color consistency. May vary or be changed. L70 hours calculated based on LED package manufacturer LM80 report and ISTMT report of LED in luminaire. Stated values are for select catalog numbers. Contact GlobaLux for detailed information.

Actual performance may differ as a result of end-user environment and application. All values are design or typical values, measured under laboratory conditions at 25 °C.

	A	B	C	Case QTY
EXS	12.7" W	10.74" H	1.64" D	6

CONSTRUCTION

Premium-grade, extruded aluminum housing (also available in optional black or white powder-coated finishes.). Self-adhesive Chevron appliques and guide template provided for directional indication.

ELECTRICAL

Dual 120/277 voltage. Charge rate/power "ON" LED indicator light and push-to-test switch for mandated code compliance testing. 4.8V long-life, maintenance - free, rechargeable NiCad. Internal solid-state transfer switch automatically connects the internal battery to the LED lamp head for minimum 90-minute emergency illumination. Fully automatic solid-state, two-rate charger initiates battery charging to recharge a discharged battery in 24 hours.

QUALIFICATIONS

Meets UL924, NFPA 11 life safety Code, NEC, OSHA Local and State Codes. UL listed for damp locations (0° C - 50° C).

INSTALLATION

Aluminium mounting canopy included for top, end, or back mount.

WARRANTY

5-year Limited Warranty on all electronics and housing.
Battery pro rated for 5 years.

COMPATIBLE JUNCTION BOXES



4" PVC



4" Octagon



4" PVC Ceiling Box



3-1/2" Octagon



4" Round Pancake



4" Octagon / V Bracket