

High Performance Design Can Customize To Your Environment

Sensor capabilities

Optional On/Off, Dimming, Bi-Level configurations for networked control. Servicing 10'-45' mounting heights with aisle or 360 detection.

Lens

Full-length U-wrap Acrylic lens and a one-piece fabricated steel body.

Housing

Rugged construction, solid die-formed, cold-rolled steel housing. Frosted diffusers provides even consistent light while reducing glare.

Knockouts

Back and end knockouts.




LEW Wattage Comparison

Workshops, garages, corridors, multi-family homes



Ordering Information

Dimensions

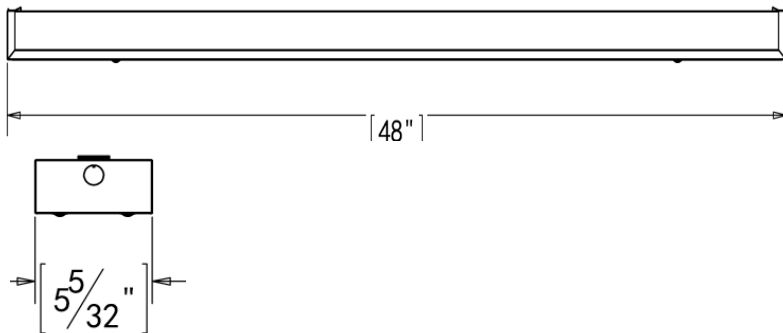

Specification Features



Construction

Rugged construction, solid die formed, cold-rolled steel housing. All surfaces powder coated after fabrication. Frosted polystyrene diffusers provides even consistent light while reducing glare. Lens design and materials provide uniform appearance without pixelation.

Qualifications

All luminaires are built to UL 1598 and 2108 standards, and bear appropriate ETL labels. Damp location labeling is standard. Emergency equipped fixtures labeled UL924. Adheres to LM70, LM80, and TM21 industry standards. ENERGY STAR® certified product (for 3000K and 4000K only).

Warranty

5-year limited warranty. See complete warranty for terms and exclusions. (Labor not included).

Electrical

Equipped standard with fixed output driver. Long-Life LED's 60,000 hours at L80 with projected life over 100,000 hours for reduced life cycle maintenance costs.

Installation

Suitable for surface mounting, suspension, or stem mounting, individually or in continuous.

LEW Series
40W (4000 Lumens)

Rated Life 60,000 hours
Limited Warranty 5 years
Efficacy Up to 103 LPW

Quick Ship
LEW-5-40-MV-840

Ordering Information

Example: LEW-5-40-MV-840

LEW	5	40	MV	8	40	
Series LEW LED Economy Wrap	Size 5- 5" Width	Rated Wattage 40- 40W (4000 Lumens)	Driver Type MV- 120-277V	CRI 8 80+ CRI	Color Temp 40 4000 K 50 5000 K ¹	

Specifications and Dimensions subject to change without notice.

¹ Made to order items. Minimum 90 day lead time. Minimum 500 order quantity.

² Energy star listed