

High Performance Design Can Customize To Your Environment

Precision Optics

The LFL Series LED Flood Light utilizes precision optics to beautifully illuminate a range of applications

Lens

Clear, injection-molded acrylic lens creates uniform light distribution while maximizing lumen output



High efficiency LED's

High performance, long lasting SMD LED's with high lumen output, provide 50,000 hour average life making the fixture virtually maintenance free

Housing

Rugged aluminum alloy suitable for outdoor environments


Mounting

Suitable for wall mounting using Yoke, Surface, or Knuckle mounting

Instant On


Instant Start, Flicker Free

LFL Wattage Comparison

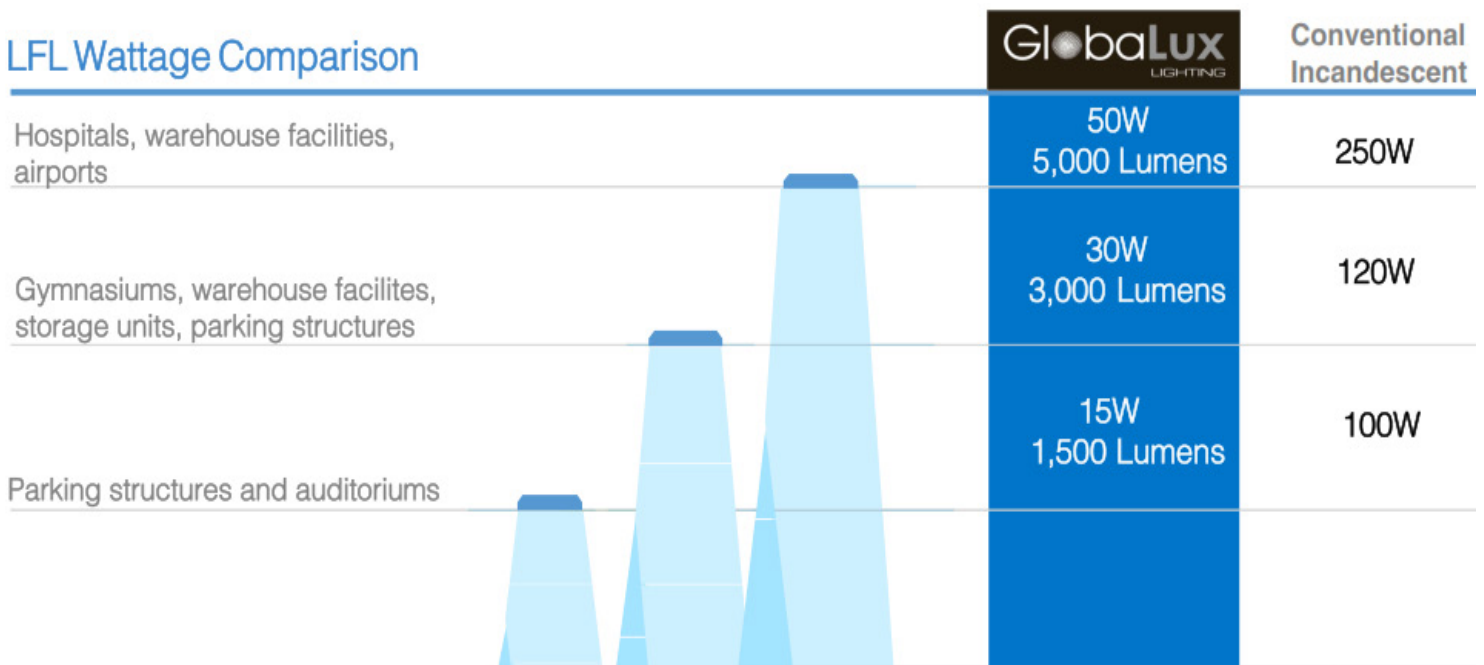

Ordering Information

Dimensions

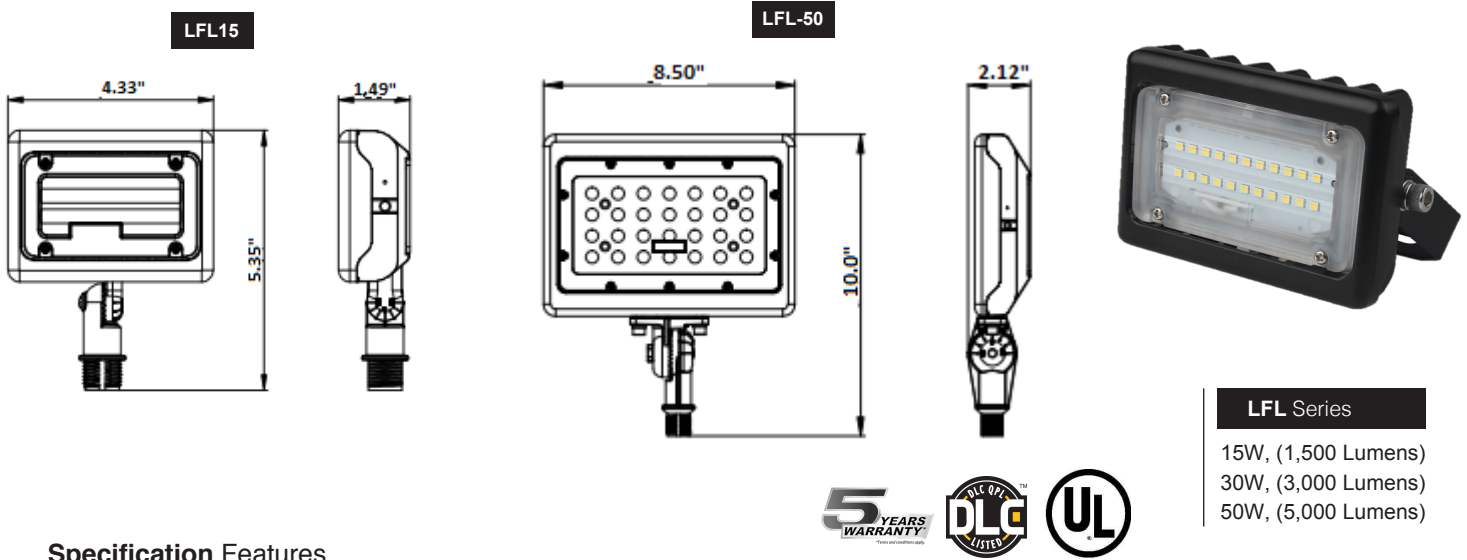

LFL Series
15W, (1,500 Lumens)
30W, (3,000 Lumens)
50W, (5,000 Lumens)

Rated Life 50,000 hours
Limited Warranty 3 years
Efficacy Up to 100 LPW

Quick Ship/ DLC Qualified
LFL-15-MV-850
LFL-30-MV-850
LFL-50-MV-850

Specification Features

Construction

Rugged low profile aluminum alloy housing withstands outdoor environments. Outer surface treated with durable powder coating to provide resistance to corrosion, rust, weathering and/or degradation.

Certification

All luminaires are built to UL 1598 and 2108 standards, and bear appropriate ETL labels. Wet location labeling is standard. Not all models of this product may be DLC qualified. Please check the DLC Qualified Products List at www.designlights.org/QPL to confirm which models are qualified.

Warranty

3-year Limited Warranty. See complete warranty for terms and exclusions. (Labor not included).

Electrical

Equipped standard with 120-277V fixed output driver operating at 60HZ.

Installation

Suitable for wall mounting using Yoke or surface or Knuckle mounting.

Ordering Information

Example: LFL-15-120-850

LFL		120	8	50	KM	
Series LFL LED Flood Light	Rated Watage 15- 15W, (1,500 Lumens) 30- 30W, (3,000 Lumens) 50- 50W, (5,000 Lumens)	Driver Type MV- 120-277V	CRI 8 80+ CRI	Color Temp 50 5000 K	Mounting KM- Knuckle Mount YM- Yoke Mount	

Specifications and Dimensions subject to change without notice.