


# Ordering Information

## Dimensions



## Specification Features

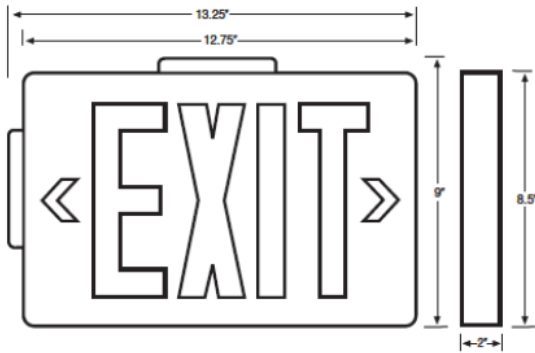

### Construction

Premium-grade, die-cast aluminum housing ( also available for in optional black or white powder-coated finishes). Field selectable knockout Chevron directional indicators. Quick-snap face plate closure. Unique design allows double face conversion in the field.

### Qualifications

Meets UL924, NFPA 11 life safety Code, NEC, OSHA Local and State Codes. UL listed for damp locations ( 0° C - 50° C ).

### Warranty

5-year Limited Warranty on all electronics and housing. Battery pro rated for 5 years.

### Electrical

Dual 120/277 voltage. Charge rate/power "ON" LED indicator light and push-to-test switch for mandated code compliance testing. 4.8V long-life, maintenance - free, rechargeable NiCad battery. Internal solid-state transfer switch automatically connects the internal battery to the LED lamp head for minimum 90-minute emergency illumination. Fully automatic solid-state, two-rate charger initiates battery charging to recharge a discharged battery in 24 hours.

### Installation

Universal mounting pattern knock-out in back plate for J-Box mounting. EZ-snap thermoplastic mounting canopy included provides top or end mount.

AXS Series

Limited Warranty 5-years

Quick Ship

Made to order only

## Ordering Information

Example: AXS-1-W-R-A-EM

AXS	1	R	G	A	EM
<b>Series</b> AXS Aluminum Exit Sign	<b>Faces</b> 1	<b>Housing Color</b> B- Black W- White	<b>Lettering</b> R - Red G - Green A- Aluminum	<b>Face Panel</b> A-Aluminum R- Red G- Green	<b>Battery</b> EM- Battery Backup AC - AC only EM- 90 minute battery

Specifications and Dimensions subject to change without notice.