


Ordering Information

Dimensions

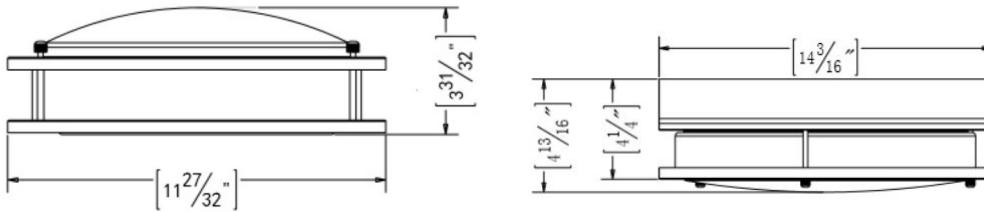

DCR Series

12" Pan

17W, 1,360 Lumens

14" Pan

26W, 1,840 Lumens

Rated Life 50,000 hours
Limited Warranty 3 years
Efficacy Up to 70.5 LPW
Continuous Dimming



Quick Ship

Coming Soon

DCR-12-17-120D-927/50-NS

DCR-14-26-120D-927/50-NS

Specification Features



Construction

Contemporary styled fixture. Twin steel rings surround a milk white acrylic diffuser which provides widespread and even illumination

Qualifications

All luminaires are built to UL 1598 and 2108 standards, and bear appropriate ETL labels. Damp location labeling is standard. Adheres to LM70, LM80, and TM21 industry standards. ENERGY STAR® certified product and Title 24 qualified. Dedicated 120V Models are FCC Title 47 CFR, Part 15, Class B for residential and commercial applications. California Title 24 Compliant, JA8 compliant, CEC Listed.

Warranty

3-year limited warranty. See complete warranty for terms and exclusions. (Labor not included).

Electrical

Equipped standard with 120V 10-100% dimming driver.

Installation

Designed for mounting on 4" electrical J-Box.

Ordering Information

Example: DCR-12-17-120D-927/50-NS

DCR		13	120D	9	30	NS
Series DCR LED Ringed Ceiling Fixture	Size 12- 12" Pan 14- 14" Pan	Rated Wattage 12" Pan 17- 17W, 1,360 Lumens ² 14" Pan 26- 26W, 1,840 Lumens ²	Driver Type 120D-120V Dimming, Dims to 10% MV- 120-277V ¹	CRI 9 90+ CRI	Color Temp 27/50- 2700K, 3000K, 3500K, 4000K, 5000K CCT Selectable	Finish NS- Nickel Satin ² ORB- Oil Rubbed Bronze ^{1 2}
Options						
Emergency Backup		Controls		Accessories		
N/A		N/A		N/A		

Specifications and Dimensions subject to change without notice.

¹ Made to order items. Minimum 90 day lead time. Minimum 500 order quantity.

² Energy star listed